




TECHNICAL DATA SHEET

Parameter	Flooring Specifications
Actual Size	1.00×1.00m x 45mm / pcs 1 pcs / m ²
Weight	15.8 kg / pcs 15.8 kg / m ²
Weight Load	over 680 tons/m ²
Color	Black

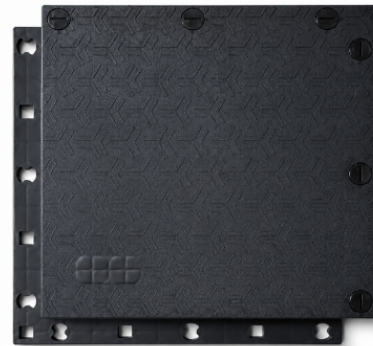

Dimensions: L1090mm x W1090mm x H45mm



40ft HC container: 1200 pcs / 1200 m²



20ft GP container: 480 pcs / 480 m²

SOLUTIONS FOR MINING SITE, WIND FARM PROJECT, CONSTRUCTION



ROADWAYS



CONSTRUCTION



Designed for outdoor events, weddings, functions and tent platforms.

ARMORMAX PROFLOOR APPLICATIONS

Interlocking Performance Flooring for Reliable Temporary Ground Protection



HEAVY-DUTY

ArmorMax Profloor forms durable temporary roadways, truck lanes, cargo routes, mining bases and event surfaces.




TEMPORARY

Uses secure interlocking connectors for rapid installation and removal, supports repeated projects without sacrificing platform stability or site efficiency.




TEMPORARY


Dust & mud control
the panels stabilize soft ground and help keep work areas cleaner.

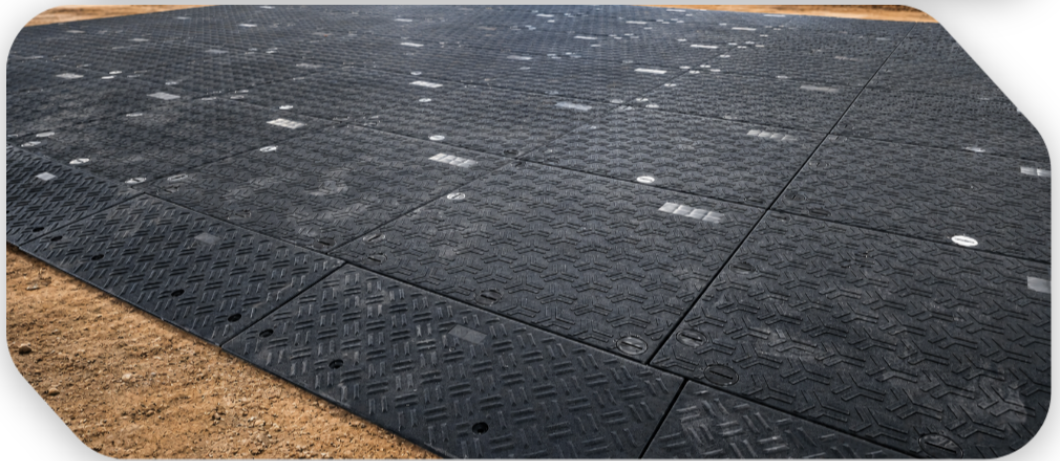


FAST INSTALLTION

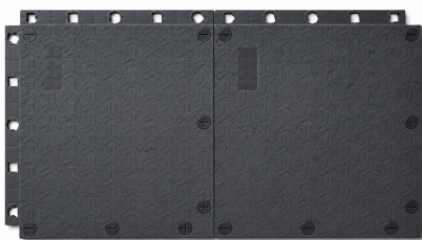

STEP 1: INSTALL BASES

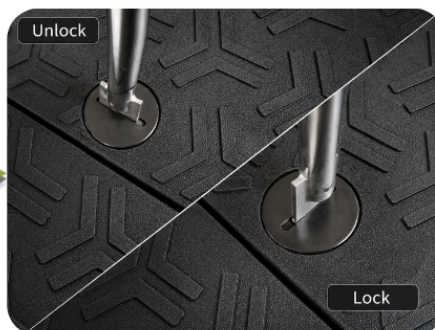

STEP 2: CONNECT EASILY

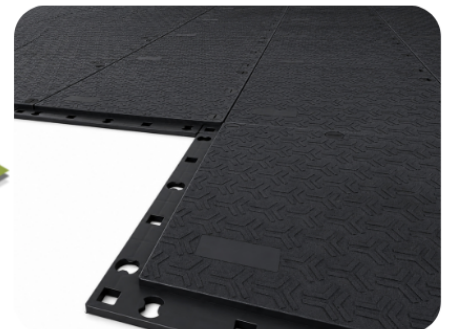

STEP 3: LOCK IN

Simple assembly with no complicated tools.